



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

| APPLICATION NO. | FILING DATE | FIRST NAMED INVENTOR | ATTORNEY DOCKET NO. | CONFIRMATION NO. |
|-----------------|-------------|----------------------|---------------------|------------------|
| 09/399,995 | 09/20/1999 | SANG-SIK PARK | 5649-659 | 2947 |

20792 7590 01/27/2005

MYERS BIGEL SIBLEY & SAJOVEC
PO BOX 37428
RALEIGH, NC 27627

| |
|----------|
| EXAMINER |
|----------|

MISLEH, JUSTIN P

| | |
|----------|--------------|
| ART UNIT | PAPER NUMBER |
|----------|--------------|

2612

DATE MAILED: 01/27/2005

Please find below and/or attached an Office communication concerning this application or proceeding.

Office Action Summary

Application No.

09/399,995

Applicant(s)

PARK, SANG-SIK

Examiner

Justin P Misleh

Art Unit

2612

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If the period for reply specified above is less than thirty (30) days, a reply within the statutory minimum of thirty (30) days will be considered timely.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

Status

- 1) ☒ Responsive to communication(s) filed on 27 September 2004.
- 2a) ☐ This action is **FINAL**. 2b) ☒ This action is non-final.
- 3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

Disposition of Claims

- 4) ☒ Claim(s) 1, 4 - 20, and 22 is/are pending in the application.
- 4a) Of the above claim(s) _____ is/are withdrawn from consideration.
- 5) ☐ Claim(s) _____ is/are allowed.
- 6) ☒ Claim(s) 1, 4, 7 - 9, 11 - 15, 17 - 20, and 22 is/are rejected.
- 7) ☒ Claim(s) 5, 6, 10 and 16 is/are objected to.
- 8) ☐ Claim(s) _____ are subject to restriction and/or election requirement.

Application Papers

- 9) ☐ The specification is objected to by the Examiner.
- 10) ☒ The drawing(s) filed on 20 September 1999 is/are: a) ☒ accepted or b) ☐ objected to by the Examiner.
Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).
Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).
- 11) ☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

Priority under 35 U.S.C. § 119

- 12) ☒ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
- a) ☒ All b) ☐ Some * c) ☐ None of:
1. ☒ Certified copies of the priority documents have been received.
2. ☐ Certified copies of the priority documents have been received in Application No. _____.
3. ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).
- * See the attached detailed Office action for a list of the certified copies not received.

Attachment(s)

- 1) ☒ Notice of References Cited (PTO-892)
- 2) ☐ Notice of Draftperson's Patent Drawing Review (PTO-948)
- 3) ☐ Information Disclosure Statement(s) (PTO-1449 or PTO/SB/08)
Paper No(s)/Mail Date _____.
- 4) ☐ Interview Summary (PTO-413)
Paper No(s)/Mail Date. _____.
- 5) ☐ Notice of Informal Patent Application (PTO-152)
- 6) ☐ Other: _____.

DETAILED ACTION

Response to Arguments

1. Applicant's arguments in the Request for Reconsideration After Final Action, filed 27 September 2004, with respect to the rejection of Claims 1, 14, and 20 as being anticipated by Hynecek have been fully considered and are persuasive. Therefore, the rejection has been withdrawn. However, upon further consideration, a new ground of rejection is made in view of Garfinkel et al.
2. Because Claim 14 is an original claim and a new ground of rejection is made thereupon, the Examiner has reopened prosecution and this Office Action is meant to replace the Office Action mailed on 12 March 2004 and is a **Non-Final Office Action**.
3. There are no objections to the specification and the drawings.

Claim Objections

4. **Claims 4, 7, and 20** are objected to because of the following informalities: minor typographical errors.
 - As for **Claims 4 and 20**, the claim language states therein, "bias terminal to the power source;" however, "the power source" has not been previously introduced. For the purposes of examination, "the power source" will be interpreted as "a power source."
 - As for **Claim 7**, the claim language states therein, "the power source;" however, "the power source" has not been previously introduced. For the purposes of examination, "the power source" will be interpreted as "a power source."

Appropriate correction is required.

Claim Rejections - 35 USC § 103

5. The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:

(a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negated by the manner in which the invention was made.

6. **Claims 1, 4, 7 – 9, 11 – 15, 17 – 20, and 22** are rejected under 35 U.S.C. 103(a) as being unpatentable over Hynecek in view of Garfinkel et al.

7. For **Claim 1**, Hynecek discloses, as shown in figure 2 and as stated in columns 1 (lines 10 – 16 and 60- 67) and 2 (lines 1 – 33), an output-compensated buffer (see figure 2), comprising:

a buffer circuit (see figure 2) that receives an input signal (received from circuit 55 and applied to the gate of transistor 52) and produces an output signal responsive thereto at an output terminal (62), said buffer circuit (figure 2) including an input source follower circuit (52) that receives the input signal (from circuit 55); and

a feedback circuit having an input connected to said output terminal (62) and an output connected to a bias terminal (Transistor 54 is part of the input source follower circuit; wherein the gate of transistor 54 is a bias terminal of the input source follower circuit.) of said input source follower circuit and operative to vary an input of said source follower circuit responsive to the output signal at said output terminal (see column 2, lines 22 – 32).

While Hynecek disclose the feedback loop stated above, Hynecek does not disclose that the feedback includes a capacitor therein so as to capacitively couple the buffer circuit output to the buffer circuit input. In other words, Hynecek does not disclose varying the input capacitance of the source follower circuit.

On the other hand, Garfinkel et al. also provides a charge detection buffer. More specifically, Garfinkel et al. disclose, as shown in figure 1 and as stated in columns 2 (lines 7 – 10, 28 – 30, and 54 – 68), 3 (lines 1 – 11 and 62 – 68), 4 (line 1), and 6 (lines 11 – 18), a buffer comprised of a feedback circuit (24) beginning at an output terminal (38) of a buffer circuit (20) and ending at an input terminal (19) of the buffer circuit (20), wherein the input terminal (19) is the input of a source follower circuit (25) and feedback circuit (24) is capacitively coupled (by means of capacitor C_{FB}) to the input so as to vary the input capacitance of the source follower (25) response to the output at the output terminal (38).

In summary, as stated in columns 1 (lines 10 – 13) and 6 (lines 11 – 18), at the time the invention was made, it would have been obvious to one with ordinary skill in the art to have include a capacitively coupled feedback circuit, as taught by Garfinkel et al., in the output compensated buffer, disclosed by Hynecek, as a means for enabling small signal currents to be detected in the presence of very large background currents while ensuring the linearity of the circuit.

8. As for **Claim 4**, Hynecek discloses, an output-compensated buffer according to Claim 1, wherein said feedback circuit (circuit path beginning at the output terminal 62 and ending at transistor 52, wherein the path is intercepted with a power source VDD and a resistor 64) is

Art Unit: 2612

operative to couple the bias terminal (the drain of the circuit 52) to the power source (VDD) responsive to the output signal at the output terminal (62).

As stated above, Garfinkel et al. teach how the feedback is capacitively coupled so as to variably capacitively couple the feedback circuit to the bias terminal.

9. As for **Claim 7**, Hyneczek discloses, an output-compensated buffer according to Claim 1, wherein said source follower circuit (52) comprises:

a first transistor (52) having a source terminal, a gate terminal configured to receive the input signal (from circuit 55), and a drain terminal connected to the power source (VDD) through a resistor (64); and

a second transistor (54) having a drain terminal connected to the source terminal of the first transistor (by means of the node supplying an input signal to the circuit 50), a source terminal connected to a signal ground (clearly shown in figure 2) and a gate terminal configured to receive a control signal (initially, a gate terminal of a transistor is always configured to receive a control signal as it the means that controls the transistor; moreover a control signal is supplied constant current source 60); and

wherein said feedback circuit (circuit path beginning at the drain of the circuit 50 and ending at the drain of the circuit 52, wherein the path is intercepted with a power source VDD and a resistor 64) is coupled to the drain terminal of said first transistor.

10. As for **Claim 8**, Hyneczek discloses, an output-compensated buffer according to Claim 7, wherein said feedback circuit (circuit path beginning at the drain of the circuit 50 and ending at the drain of the circuit 52, wherein the path is intercepted with a power source VDD and a resistor 64) is coupled the bias terminal (the drain of the circuit 52).

As stated above, Garfinkel et al. teach how the feedback is capacitively coupled so as to variably capacitively couple the feedback circuit to the bias terminal.

11. As for **Claim 9**, Hyneczek discloses, an output-compensated buffer according to Claim 8, wherein said feedback circuit (circuit path beginning at the drain of the circuit 50 and ending at the drain of the circuit 52, wherein the path is intercepted with a power source VDD and a resistor 64) is operative to couple the bias terminal (the drain of the circuit 52) to the power source (VDD) responsive to the output signal at the output terminal (62).

As stated above, Garfinkel et al. teach how the feedback is capacitively coupled so as to variably capacitively couple the feedback circuit to the bias terminal.

12. As for **Claim 11**, Hyneczek discloses, an output-compensated buffer according to Claim 1, wherein the output terminal (62) of the buffer circuit (see figure 2) is an output terminal of the source follower circuit.

13. As for **Claim 12**, Hyneczek discloses, an output-compensated buffer according to Claim 1, wherein the buffer circuit (figure 2) further comprises a source follower circuit (54) connected to an output (the output and the source of the circuit 52 and the drain of the circuit 54 are the same node) of the input follower circuit (52) and operative to produce the output signal responsive to the inputs signal (from circuit 55) applied the input source follower circuit (52).

14. As for **Claim 13**, Hyneczek discloses, an output-compensated buffer according to Claim 1, in combination with a CCD image capture device (inherent; see explanation below), wherein the CCD image capture device includes a horizontal transfer section that generates the input signal (included in the inherency above).

While Hynecek does not show the details of a CCD imager, the amplifier disclosed by Hynecek clearly designed for and directly used by CCD imager sensors. Therefore, it is inherent that a CCD exists and includes the horizontal transfer section; otherwise, the amplifier of Hynecek would be rendered inoperable.

15. As for **Claim 18**, Hynecek discloses, an output-compensated buffer according to Claim 13, wherein the buffer circuit (figure 2) further comprises a source follower circuit (54) connected to an output (the output and the source of the circuit 52 and the drain of the circuit 54 are the same node) of the input follower circuit (52) and operative to produce the output signal responsive to the inputs signal (from circuit 55) applied the input source follower circuit (52).

16. For **Claim 14**, Hynecek discloses, as shown in figure 2 and as stated in columns 1 (lines 10 – 16 and 60- 67) and 2 (lines 1 – 33), an output-compensated buffer (see figure 2), comprising:

a buffer circuit (see figure 2) that receives an input signal (from circuit 55) and produces an output signal responsive thereto at an output terminal (62), said buffer circuit (figure 2) including an input source follower circuit (52) that receives a bias voltage from a power source (VDD); and

a feedback circuit (circuit path beginning at the drain of the circuit 50 and ending at the drain of the circuit 52, wherein the path is intercepted with a power source VDD and a resistor 64) connected to said output terminal (62, by means of circuit 50) and to said input source follower circuit (by means of the drain of the circuit 52) and operative to couple the power source (VDD) and the bias terminal (the drain of circuit 52).

While Hynecek disclose the feedback loop stated above, Hynecek does not disclose that the feedback includes a capacitor therein so as to capacitively couple the buffer circuit output to the buffer circuit input. In other words, Hynecek does not disclose varying the input capacitance of the source follower circuit via a capacitor.

On the other hand, Garfinkel et al. also provides a charge detection buffer. More specifically, Garfinkel et al. disclose, as shown in figure 1 and as stated in columns 2 (lines 7 – 10, 28 – 30, and 54 – 68), 3 (lines 1 – 11 and 62 – 68), 4 (line 1), and 6 (lines 11 – 18), a buffer comprised of a feedback circuit (24) beginning at an output terminal (38) of a buffer circuit (20) and ending at an input terminal (19) of the buffer circuit (20), wherein the input terminal (19) is the input of a source follower circuit (25) and feedback circuit (24) is capacitively coupled (by means of capacitor C_{FB}) to the input so as to vary the input capacitance of the source follower (25) response to the output at the output terminal (38).

In summary, as stated in columns 1 (lines 10 – 13) and 6 (lines 11 – 18), at the time the invention was made, it would have been obvious to one with ordinary skill in the art to have include a capacitively coupled feedback circuit, as taught by Garfinkel et al., in the output compensated buffer, disclosed by Hynecek, as a means for enabling small signal currents to be detected in the presence of very large background currents while ensuring the linearity of the circuit.

17. As for **Claim 15**, Hynecek discloses, an output-compensated buffer according to Claim 14, wherein said source follower circuit (52) comprises:

Art Unit: 2612

a first transistor (52) having a source terminal, a gate terminal configured to receive the input signal (from circuit 55), and a drain terminal connected to the power source (VDD) through a resistor (64); and

a second transistor (54) having a drain terminal connected to the source terminal of the first transistor (by means of the node supplying an input signal to the circuit 50), a source terminal connected to a signal ground (clearly shown in figure 2) and a gate terminal configured to receive a control signal (initially, a gate terminal of a transistor is always configured to receive a control signal as it the means that controls the transistor; moreover a control signal is supplied constant current source 60); and

wherein said feedback circuit (circuit path beginning at the drain of the circuit 50 and ending at the drain of the circuit 52, wherein the path is intercepted with a power source VDD and a resistor 64) is coupled to the drain terminal of said first transistor.

18. As for **Claim 17**, Hynecek discloses, an output-compensated buffer according to Claim 14, wherein the output terminal (62) of the buffer circuit (see figure 2) is an output terminal of the source follower circuit.

19. As for **Claim 19**, Hynecek discloses, an output-compensated buffer according to Claim 14, in combination with a CCD image capture device (inherent; see explanation below), wherein the CCD image capture device includes a horizontal transfer section that generates the input signal (included in the inherency above).

While Hynecek does not show the details of a CCD imager, the amplifier disclosed by Hynecek clearly designed for and directly used by CCD imager sensors. Therefore, a CCD must

Art Unit: 2612

exist and includes the horizontal transfer section; otherwise, the amplifier of Hynecek would be rendered inoperable.

20. For **Claim 20**, Hynecek discloses, as shown in figure 2 and as stated in columns 1 (lines 10 – 16 and 60- 67) and 2 (lines 1 – 33), an image capture device, comprising:

a charged coupled device (CCD) that generates a video signal (see explanation below);

a buffer circuit (see figure 2) responsive to the CCD and operative to receive the video signal (received from circuit 55 and applied to the gate of transistor 52) and produces an output signal responsive thereto at an output terminal (62), said buffer circuit (figure 2) including an input source follower circuit (52) that receives the input signal (from circuit 55); and

a feedback circuit having an input connected to said output terminal (62) and an output connected to a bias terminal (Transistor 54 is part of the input source follower circuit; wherein the gate of transistor 54 is a bias terminal of the input source follower circuit.) of said input source follower circuit and operative to vary an input of said source follower circuit responsive to the output signal at said output terminal (see column 2, lines 22 – 32).

While Hynecek does not show the details of a CCD imager, the amplifier disclosed by Hynecek clearly designed for and directly used by CCD imager sensors. Therefore, a CCD must exist; otherwise, the amplifier of Hynecek would be rendered inoperable.

Furthermore, while Hynecek disclose the feedback loop stated above, Hynecek does not disclose that the feedback includes a capacitor therein so as to capacitively couple the buffer circuit output to the buffer circuit input. In other words, Hynecek does not disclose varying the input capacitance of the source follower circuit.

Art Unit: 2612

On the other hand, Garfinkel et al. also provides a charge detection buffer. More specifically, Garfinkel et al. disclose, as shown in figure 1 and as stated in columns 2 (lines 7 – 10, 28 – 30, and 54 – 68), 3 (lines 1 – 11 and 62 – 68), 4 (line 1), and 6 (lines 11 – 18), a buffer comprised of a feedback circuit (24) beginning at an output terminal (38) of a buffer circuit (20) and ending at an input terminal (19) of the buffer circuit (20), wherein the input terminal (19) is the input of a source follower circuit (25) and feedback circuit (24) is capacitively coupled (by means of capacitor C_{FB}) to the input so as to vary the input capacitance of the source follower (25) response to the output at the output terminal (38).

In summary, as stated in columns 1 (lines 10 – 13) and 6 (lines 11 – 18), at the time the invention was made, it would have been obvious to one with ordinary skill in the art to have include a capacitively coupled feedback circuit, as taught by Garfinkel et al., in the output compensated buffer, disclosed by Hynecek, as a means for enabling small signal currents to be detected in the presence of very large background currents while ensuring the linearity of the circuit.

21. As for **Claim 22**, Hynecek discloses, an output-compensated buffer according to Claim 1, wherein said feedback circuit (circuit path beginning at the output terminal 62 and ending at transistor 52, wherein the path is intercepted with a power source VDD and a resistor 64) is operative to couple the bias terminal (the drain of the circuit 52) to the power source (VDD) responsive to the output signal at the output terminal (62).

As stated above, Garfinkel et al. teach how the feedback is capacitively coupled so as to variably capacitively couple the feedback circuit to the bias terminal.

Allowable Subject Matter

22. **Claims 5, 6, 10, and 16** are objected to as being dependent upon a rejected base claim, but would be allowable if rewritten in independent form including all of the limitations of the base claim and any intervening claims.

23. As for **Claims 5 and 16**, while the prior art teaches of an output-compensated buffer comprised of a buffer circuit including an input source follower circuit that receives an input signal and a feedback circuit connected to an output terminal and to the input source follower circuit that is operative to vary an input capacitance of the source follower circuit wherein the bias terminal of the input source follower circuit is coupled to a power source and wherein the feedback circuit is variably capacitively coupled the power source and the bias terminal; however, the prior art does not teach or fairly suggest wherein the feedback circuit comprises a second source follower circuit having an input terminal that receives an output signal output from the input source follower circuit and an output terminal that is coupled to the bias terminal of the input source follower circuit.

24. As for **Claim 10**, while the prior art teaches of an output-compensated buffer comprised of a buffer circuit including an input source follower circuit that receives an input signal and a feedback circuit connected to an output terminal and to the input source follower circuit wherein the input source follower circuit is comprised of a first transistor having a source terminal, a gate terminal configured to receive the input signal, and a drain terminal connected to the power source through a resistor and a second transistor having a drain terminal connected to the source terminal of the first transistor, a source terminal connected to a signal ground and a gate terminal configured to receive a control signal; and wherein said feedback circuit is coupled to the drain

Art Unit: 2612

terminal of said first transistor; however, the prior art does not teach or fairly suggest wherein the feedback circuit comprises a third transistor having a source terminal, a drain terminal connected to the power source, and a gate terminal connected to the output terminal of the buffer circuit and a fourth transistor having a drain terminal connected to the source terminal of the third transistor, a drain terminal connected to a signal ground and a gate terminal configured to receive a control signal; and a capacitor coupled between the drain terminal of the fourth transistor and the drain terminal of the first transistor.

Art Unit: 2612

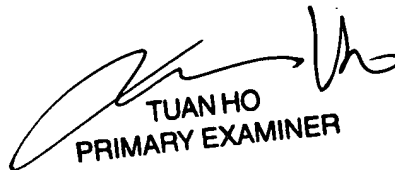
25. Any inquiry concerning this communication or earlier communications from the Examiner should be directed to Justin P Misleh whose telephone number is 703.305.8090. The Examiner can normally be reached on Monday through Thursday from 7:30 AM to 5:30 PM and on alternating Fridays from 7:30 AM to 4:30 PM.

If attempts to reach the Examiner by telephone are unsuccessful, the Examiner's supervisor, Wendy R Garber can be reached on 703.305.4929. The fax phone number for the organization where this application or proceeding is assigned is 703.872.9306.

Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free).

JPM

December 22, 2004


TUAN HO
PRIMARY EXAMINER